



## Pairing and Configuration

### Derailleur Eagle AXS/Seatpost Reverb AXS with BlipBox AXS

#### 1<sup>st</sup> step: Pairing the components together

Pairing the AXS components together is required to add the system successfully to a bike profile in the Sram AXS Mobile App.

1. Derailleur Press and hold button till blinking slowly
2. BlipBox Press and hold button till blinking fast
3. Dropper Post Press and hold button till blinking fast
4. BlipBox Press and hold button till blinking fast
5. Derailleur Derailleur is still blinking press button and release

YouTube video link below shows procedure with Sram shifters. For setup with BlipBox press the BlipBox instead of the Sram shifters as listed above.

<https://www.youtube.com/watch?v=8GWvHNS8TdY>


#### 2<sup>nd</sup> step: BlipBox Configuration via Sram AXS Mobile App

1. Open Sram Mobile App
2. Create a bike profile
3. Add the derailleur Eagle AXS, Seatpost Reverb AXS and BlipBox AXS to the bike profile.

Below is a link to Sram guideline “ How do I create a bike profile and assign my AXS components using the AXS Mobile App? ”

<https://support.sram.com/hc/en-us/articles/1500000517121-How-do-I-create-a-bike-profile-and-assign-my-AXS-components-using-the-AXS-Mobile-App->

4. Select menu CONFIGURE CONTROLS

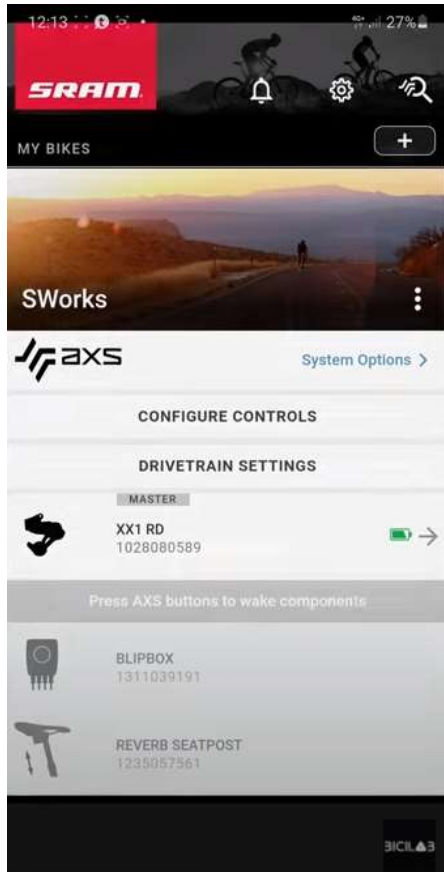

5. Following screen appears and you can assign all the components to port (controller) 1, 2, 3 and 4, as you want.

